

# 81915B CELLULAR REMOTE ACCESS

SAMUEL JACKSON


**PARTS INCLUDED**

2 - Magnetic Antennas • 1 - Remote Access Router • 1 - 100' Cat 5 Cable • 1 - 100' Power Cable

**1**

Place both antennas outside of the gin for best signal.

Ideally on roof for best signal




DRIP LOOP OUTSIDE

**2**

Connect antennas to ports on bottom of modem (main and aux)


ANTENNA PORTS

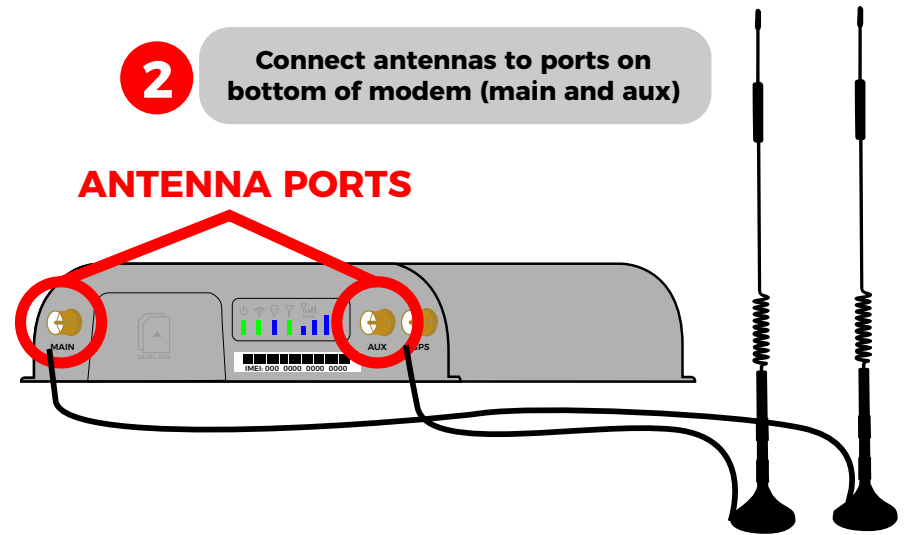

**3**

Connect power adapter to bottom of modem

POWER PORT

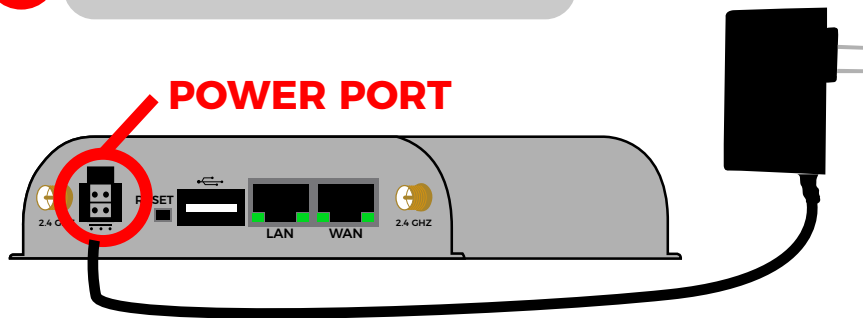


**4**

Connect network cable from modem to Sam Jackson network.

*(Usually in a SJI toolbox or fiberglass box near the Mirror PLC Panel)*

LAN PORT

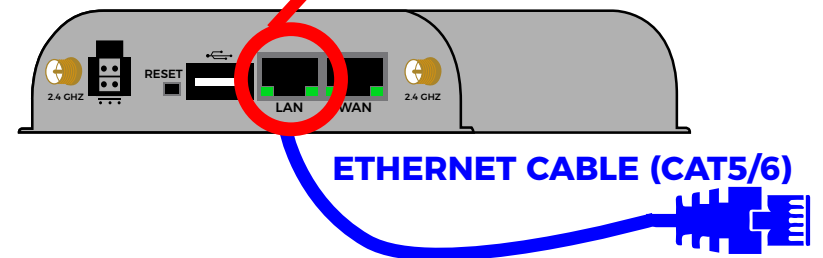







ETHERNET CABLE (CAT5/6)

# 81915B CELLULAR REMOTE ACCESS

SAMUEL JACKSON

**5** Check the status lights.


## STATUS LIGHTS

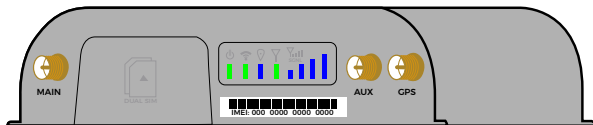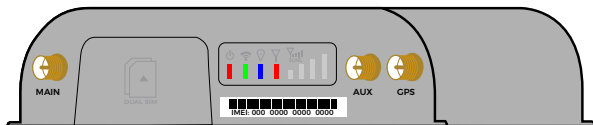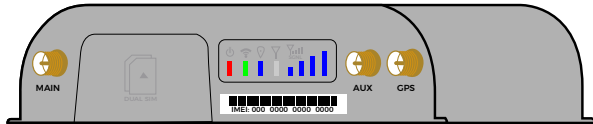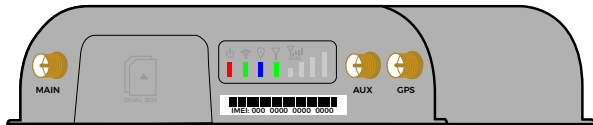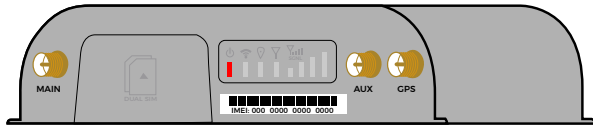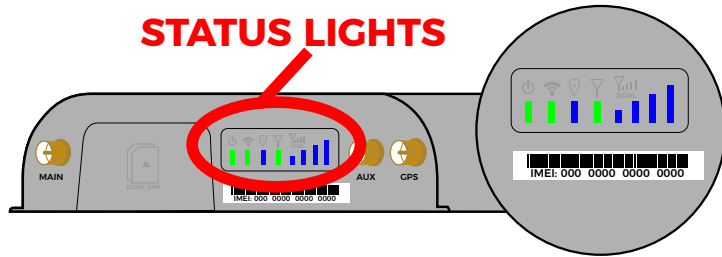


3-5 Minute boot cycle

**READY STATUS**


## TROUBLESHOOTING IF ROUTER DOESNT DISPLAY CORRECT LIGHTS

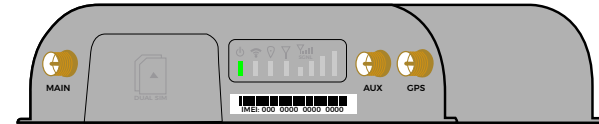


**FLASHING GREEN**  
ROUTER IS CONNECTING TO CELLULAR NETWORK.

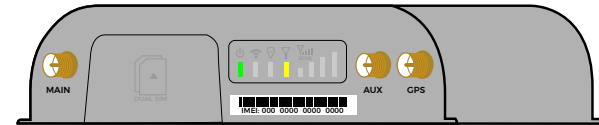

**SOLID YELLOW**  
CELLULAR NETWORK IS NOT AVAILABLE. TRY MOVING YOUR ANTENNAS TO A HIGHER LOCATION OR MORE OPEN AREA.

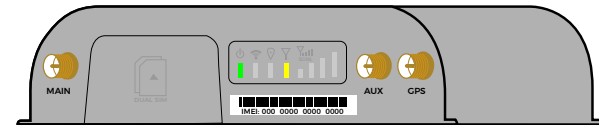

**BLINKING YELLOW**  
THERE IS A CELLULAR DATA CONNECTION ERROR. MAKE SURE THAT THE SIM CARD IS INTACT, AND DISCONNECT THEN RECONNECT POWER.

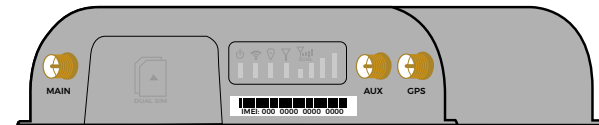

**NO LIGHTS**  
YOUR ROUTER IS OFF. MAKE SURE POWER IS CONNECTED AND THE SAMUEL JACKSON TOOLBOX HAS POWER TO IT.